

LED FLUSH DIRECT STRIPS - INDOOR




LED RIBBONS & STRIPS



55-0011

Catalog No.	Description
55-0011	40" 18W high output indoor applications LED strip
LED Specification	
15 SSC P4 LEDs 110° Beam Angle	
LED Color	Color Temperature
Cool White (C)	5800K
Natural White (N)	4000K
Warm White (W)	3000K




- +/- 3% Kelvin temperature variation
- Extruded acrylic lens cover
- 350mA constant current 18W LED driver is **NOT** included

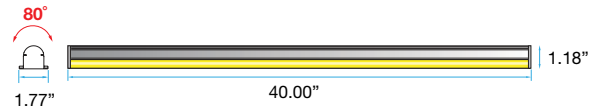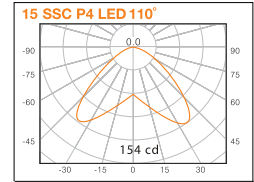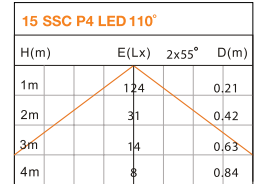

55-0025

Catalog No.	Description
55-0025	20" 9W indoor applications LED strip
LED Specification	
24V DC 18 PLCC Top LEDs 110° Beam Angle	
LED Color	Color Temperature
Cool White (C)	5800K
Natural White (N)	4000K
Warm White (W)	3000K




- +/- 3% Kelvin temperature variation
- Extruded acrylic lens cover
- 24V DC constant voltage driver is **NOT** included
- See page 79 for driver selection

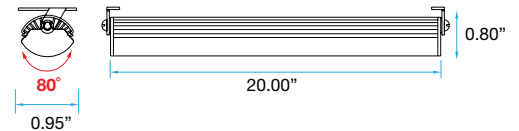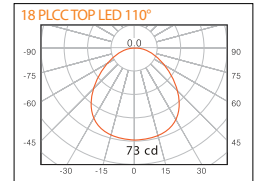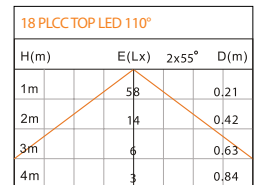


55-0033

Catalog No.	Description
55-0033	12" 1.4W indoor applications LED strip (silver finish)
LED Specification	
24V DC 24 PLCC Top LEDs 110° Beam Angle	
LED Color	Color Temperature
Cool White (C)	5800K
Natural White (N)	4000K
Warm White (W)	3000K

- +/- 3% Kelvin temperature variation
- Extruded aluminum casing
- Quick connector included (6" lead)
- 24V DC constant voltage driver is **NOT** included
- Field-cut with instruction is permissible at every 3" when needed
- See page 79 for driver selection

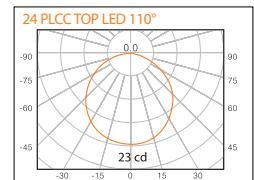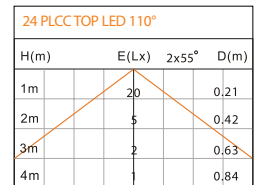


55-0033P with
55-0033P-PF

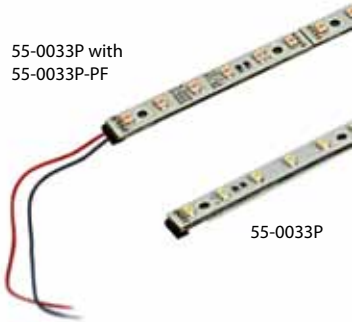

55-0033P



55-0033P-MC






Catalog No.	Description
55-0033P	12" 1.4W indoor applications LED non-bendable strip
55-0033P-MC	black mounting clip
55-0033P-PF	powerfeed with 8" lead wire

LED Specification
24V DC 24 PLCC Top LEDs 110° Beam Angle

Hardware Code	Description
Cool White (C)	5800K
Natural White(N)	4000K
Warm White (W)	3000K

- +/- 3% Kelvin temperature variation
- PCB only, male and female quick connector on board
- PCB come with double sided tape for quick mounting
- Order 55-0033P-MC mounting clip (black finish) for additional security on rough surface
- 24V DC constant voltage driver is **NOT** included
- Field-cut with instruction is permissible at every 3" scissors marked area when needed
- See page 79 for driver selection

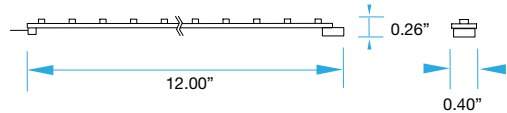




55-2030

Catalog No.	Description
55-2030	12" 1.4W indoor applications LED strip (silver finish)
55-V2-ECAP	end cap (white finish)
55-V2-J05	conductive flex up to 90° (white finish)
55-V2-L01	power feed with 11" lead wire (white finish)


LED Specification
24V DC 24 PLCC Top LEDs 110° Beam Angle

LED Color	Color Temperature
Cool White (C)	5800K
Natural White (N)	4000K
Warm White (W)	3000K


- +/- 3% Kelvin temperature variation
- Extruded aluminum casing
- Quick connector pin available
- 24V DC constant voltage driver is **NOT** included
- Accessories come in white finish only
- Field-cut with instruction is permissible at every 3" when needed
- See page 79 for driver selection



55-V2-ECAP



55-V2-J05



55-V2-L01

